


First Full Color Advanced Polymer Sealant Program

METAL ROOF *WeatherMaster Sealant*

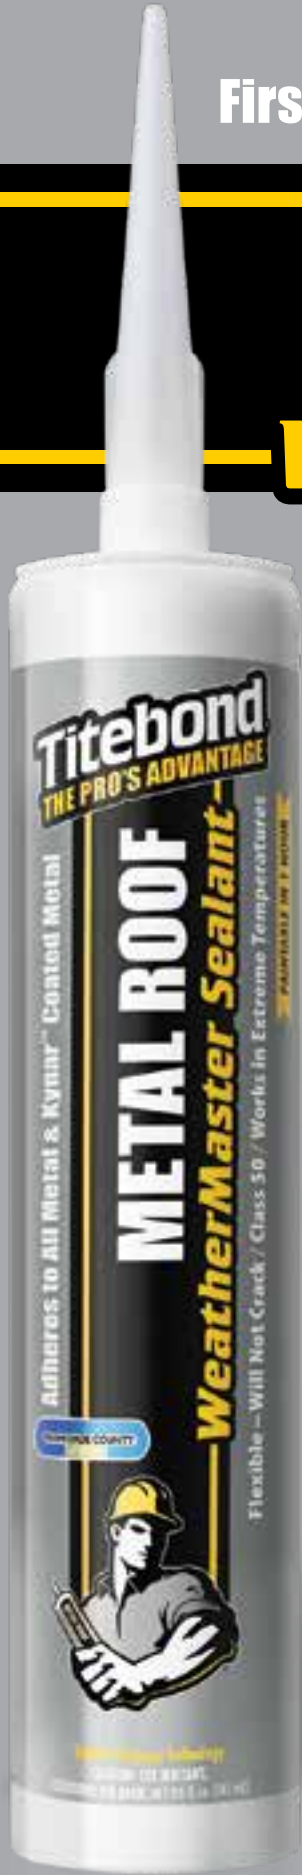

COLOR REFERENCE GUIDE

Titebond
THE PRO'S ADVANTAGE

White

63002	63012				
61001	61041	61011	61021	61031	61051

Misc

63092					
61121 Black	62611 Metallic	62621 Metallic	61981 Yellow	61111 Translucent	Crystal Clear

Brown

61131	61141	61151	61181	61191	61201

Gray


63022	63052				
62401	62411	62421	62431	62441	
62451	62461	62471	62481	62491	62511

Red


63062					
61501	61431	61441	61451	61461	61471
61481	61491	61511	61531	61541	61551
					61561

Color availability is subject to change without notice. Color samples are produced by a printing process that may result in slight color variations. For critical color matching, apply sealant to a sample of the substrate, prior to use. It is the responsibility of the user to determine suitability of the product for the particular substrate. Colors are best viewed in natural light.


Blue

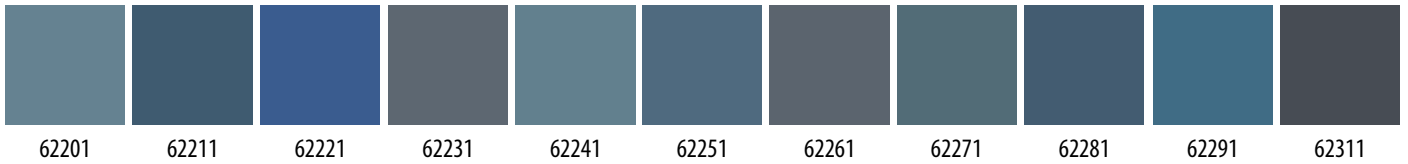


Bronze

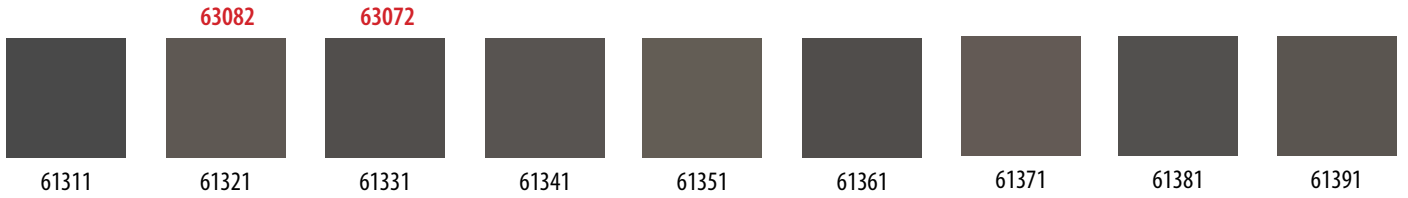


Clay

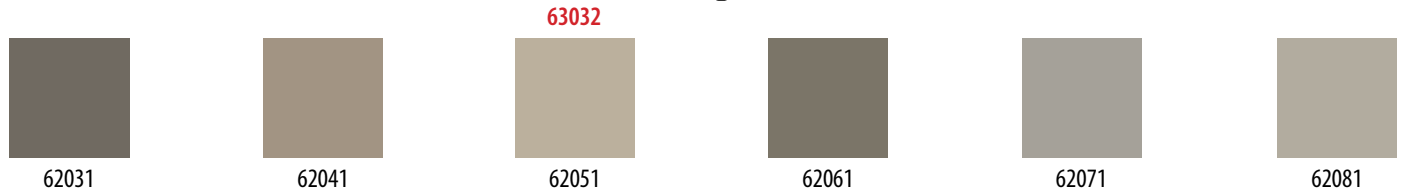

Green

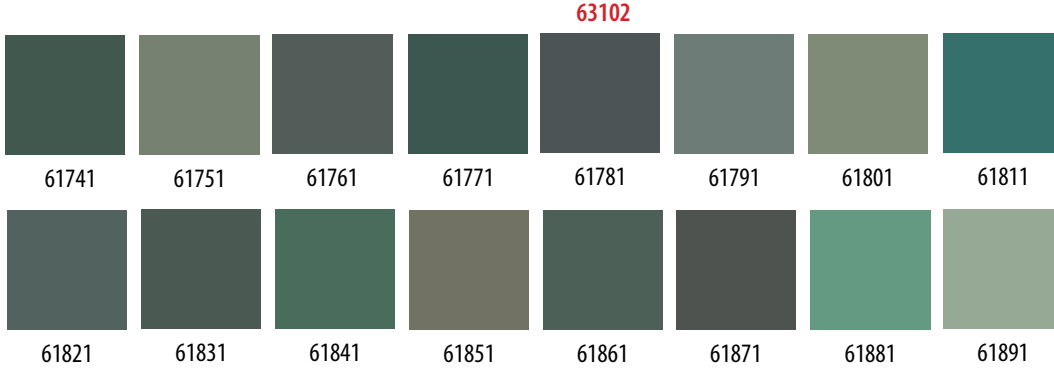

Beige

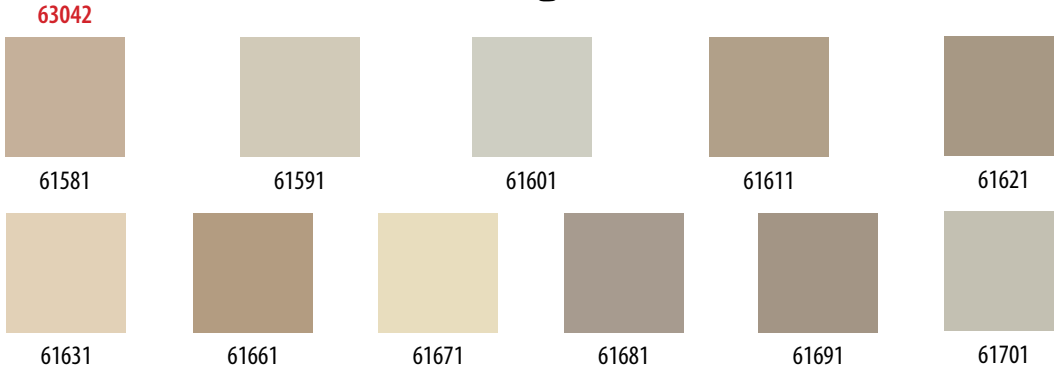

20oz Sausage Pack Product Number

Refer to titebond.com for the WeatherMaster™ Metal Roof Color Match Cross-Reference Guide.
For additional products, see the Titebond Professional Caulk & Sealant Catalog.

METAL ROOF SEALANT:

- Joint movement capability \pm 50%
- Applies in extreme weather conditions
- Available in over 100 colors
- Works great on Kynar™ coated metals

COMPARISON GUIDE:

	METAL ROOF	VOC Solvent	Silicone	Urethane	Tripolymer
PAINTABLE	1 hour (Translucent is not paintable.)	2-4 hours	No	2-7 days	24 hours
SHRINKAGE	0%	35%	5%	5%	50%
FLEXIBILITY	50%	25%	25%	25%	25%
COLD WEATHER EXTRUSION	0°F / -18°C	20°F / -7°C	-35°F / -37°C	32°F / 0°C	40°F / 4°C
VOC-COMPLIANT	Yes	Yes	Yes	Yes	Yes
SOLVENT FREE	Yes	No	Yes	No	No
ISOCYANATE FREE	Yes	No	Yes	No	Yes
EARTH FRIENDLY	Yes	No	Yes	No	No
ODOR	Slight	Heavy	Mild	Mild	Heavy
SERVICE TEMPERATURE	-75°F to 212°F -59°C to 100°C	-20°F to 200°F -29°C to 93°C	-45°F to 350°F -43°C to 177°C	-40°F to 180°F -40°C to 82°C	-40°F to 180°F -40°C to 82°C

TITEBOND OFFERS:

- One of the most respected brands among pros
- A comprehensive line of products, including construction and flooring adhesives, wood glues, caulks and sealants
- Outstanding marketing, sales and technical support



Visit Titebond.com for the most up-to-date product information.

Franklin International

Sales & Customer Service: 800.669.4583 /
Technical Service: 800.347.4583

